


MUTE SYSTEM

The logo consists of the word "MUTE" in a bold, white, sans-serif font. The letter "U" is highlighted in orange and features a grey mechanical component, resembling a valve or a piston, positioned vertically within its upper loop. Below "MUTE" is the word "SYSTEM" in the same bold, white, sans-serif font. The background is dark grey, and a diagonal grey gradient bar is visible in the bottom right corner.

MUTE
SYSTEM

All you need for the installation is:



carpet knife



driller



drill \varnothing 0.6 mm, 150 mm



hammer



electric screwdriver



hand tacker

MUTE SYSTEM

step 1





Mute Panels can be mounted on different type of masonry and monolith walls: ceramic brick with and without hollows, aerated concrete blocks and concrete walls. To achieve a high performance sound insulation it is recommended to fill all the joints with gypsum or cement based mortar.

MUTE SYSTEM


step 2

DCIax can even bumps up to 20 mm. For greater unevenness it is recommended to use gypsum or cement mortar to smooth the existing surface.



MUTE SYSTEM

step 3




The installation of the MUTE SYSTEM starts from the left bottom part of the wall and continues to the right until finishing the first row. The installation of the next row of panels, starts from the left side.

MUTE SYSTEM

step 4



The MUTE panels and the finish layer of the system have to be installed ON the DCstrip and should not contact directly with any of the existing partition elements. The outer edge of the strip should equalize with the finishing layer.



MUTE SYSTEM

step 5



Cut the left and bottom edges of the first MUTE SYSTEM panel and put it on the DCstrip on the floor, so the panel connects to the DCstrip on the left and the bottom.



MUTE SYSTEM

step 6


Insert the DCloxelements on each panel before the installing the panel. Press the DClox in the hole until the nut of the element locks into the panel.



MUTE SYSTEM

step 7


Drill a hole in the existing wall with drill Φ 6 and length of the drill at least 150 mm.

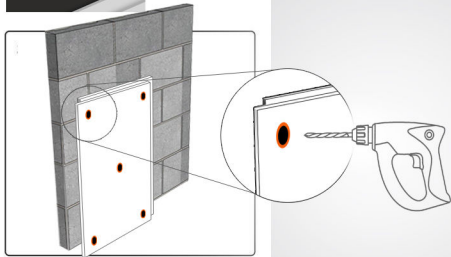

MUTE SYSTEM

step 8



Insert the screw with the dowel in the hole and push it with hammer until all the length of the dowel enter in the existing wall.



MUTE SYSTEM


step 9

Screw drive to desired overall thickness of the system. DClock element is soft enough to be compressed between 5 to 20 mm.



MUTE SYSTEM

step 10





Place the next panel (N2 from the picture), drill and screw drive all 5 DClox elements. When the first row of panels is installed, start the installation of the second row (Panels 4,5 and 6 from the picture).

MUTE SYSTEM

step 11


If the space for the last panel is less than 35 mm., cutoff an edge with tongue and groove and attach it with DCscrew to the next panel.



MUTE SYSTEM

step 12



If the space for the last panel is between 35 mm and 130 mm, cutoff the tongue and groove part of the last full size panel. Then cut a band of the remaining panel with two DClox openings, cut off the tongue of the full sized panel and fill the joints with DClant.

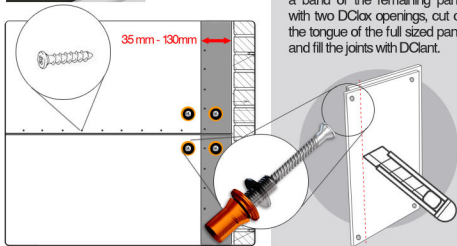

MUTE SYSTEM

step 13



If the length of the finish panel is more than 130 mm - cut a desired size of the remaining panel and use DCloxx and DCscrew to fix it. Fill in the joints with DClant.



MUTE SYSTEM

step 14


When all MUTE SYSTEM panels are installed via DCloxx and the distance between the panels and the existing wall is adjusted, screw drive DCscrew at the tongue and groove connections of each panel.



MUTE SYSTEM

step 15

Install soundproofing membrane
Decibel Visco using stapler.



MUTE
SYSTEM

step 16

Install the finish layer – gypsum board GKB 12.5 mm and screw it with DCscrew 25 mm.

